


PERFORMANCE			ROTOR SPRAY™		VARI-ROTOR SPRAY™		INVERTED ROTOR SPRAY™	
			TESTED 0.65 ft ABOVE GROUND		TESTED 0.65 ft ABOVE GROUND		TESTED 2.6 ft ABOVE GROUND	TESTED 6.6 ft ABOVE GROUND
			BASE COLOR AND ORIFICE SIZE	PRESS (psi)	FLOW (gph)	DIAMETER OF THROW (ft)	STREAM HEIGHT (inch)	DIAMETER OF THROW (ft)
BROWN 0.035"	15	8.1	15	10			13.2	17.9
	20	9.4	17	11			13.8	19.4
	25	10.5	17	13			13.8	20.3
BLUE 0.04"	15	9.8	17	11			13.9	18.5
	20	11.7	17	12			14.8	19.4
	25	13.0	17	13			15.7	20.3
GREEN 0.05"	15	16.8	19	14			13.9	19.1
	20	19.5	21	16			14.8	20.0
	25	22.0	21	21			15.7	20.9
	30	24.0	23	24			16.6	21.8
RED 0.06"	15	22.5	23	21			14.5	20.4
	20	26.5	23	23			15.4	20.8
	25	30.0	27	27			16.0	22.2
	30	33.0	27	28			16.5	24.0
ORANGE 0.07"	15	27.0	25	16			15.1	21.2
	20	31.5	27	19			15.6	23.0
	25	35.5	29	21			16.3	23.9
	30	39.0	29	24			17.2	24.4
GRAY 0.08"	15	32.5	25	18			15.1	21.2
	20	39.0	27	24			15.6	23.0
	25	43.5	29	27			16.3	23.9
	30	48.0	31	28			17.2	24.4
BLACK 0.06" max	15	0 - 22.0			0 - 23	0 - 21		
	20	0 - 26.0			0 - 23	0 - 23		
	25	0 - 30.0			0 - 27	0 - 27		
	30	0 - 33.0			0 - 27	0 - 28		

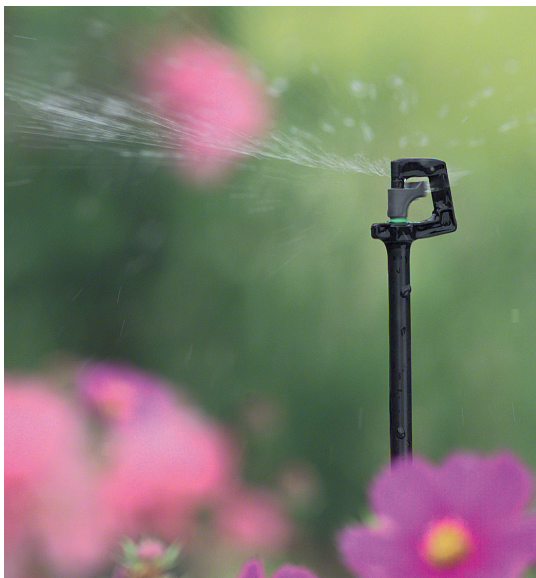

## SPECIFICATIONS

DIMENSIONS ASSEMBLED	ROTOR SPRAY™ and INVERTED ROTOR SPRAY™	VARI-ROTOR SPRAY™	UV STABILIZED MATERIALS	BASE/CONNECTION TYPE
HEIGHT	1.4"	1.8"	FRAME acetal	Inlet : 10-32 UNF THREAD
WIDTH	1.1"	1.1"	BASE acetal	
WEIGHT (approx)	0.07 oz	0.12 oz	FLIPPER nylon	