

Rotor Max™ Midi Sprinklers

Excellent single sprinkler distribution. Smooth rotation, robust design, durable construction. The inverted model has a khaki color coded 0° trajectory spinner. The standard sprinkler has a black color coded 25° trajectory spinner.

FEATURES

- Easily taken apart for servicing.
- Dual outlet sealed flipper enhances performance.
- Nozzle options are colored to identify flow.

APPLICATIONS

Greenhouses, vegetables and under tree watering. The inverted model is ideal for overhead watering in glasshouses, nurseries and shade houses.



Rotor Max™



Inverted Rotor Max™



PERFORMANCE				
NOZZLE COLOR	PRESSURE (psi)	FLOW (gph)	DIAMETER OF THROW (ft)	STREAM HEIGHT* (ft)
RED 0.11"	15	78.0	36.0	3.0
	20	90.0	39.0	3.5
	30	110.0	43.0	4.0
	40	127.0	43.0	4.5
BLACK 0.13"	15	102.0	36.0	3.0
	20	118.0	39.0	3.5
	30	145.0	43.0	4.0
	40	167.0	45.0	4.2
PURPLE 0.15"	15	145.0	40.0	2.3
	20	170.0	42.0	2.7
	30	220.0	46.0	3.4
	40	250.0	45.0	3.9


INVERTED ROTOR MAX™ TESTED 6.6ft ABOVE GROUND



ROTOR MAX™ TESTED 0.65ft ABOVE GROUND

* Stream height is applicable only to the Rotor Max™

FLOW RATE: ROTOR MAX™ and INVERTED ROTOR MAX™

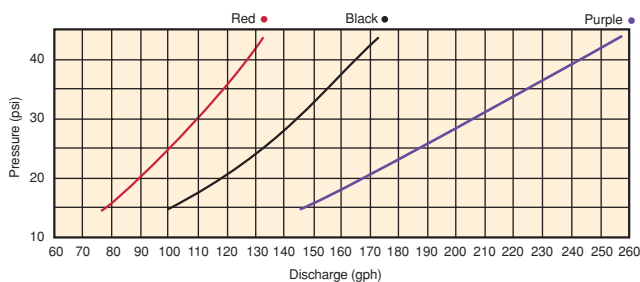

ROTOR MAX™ 1/2" BSPM

PACKAGING	NOZZLE		PART NUMBER	PRICE EACH	PACK Q'TY	PRICE PER PACK	PACKS PER CARTON	WEIGHT (lbs)
	COLOR	ORIFICE SIZE						
BULK PACK	Red	0.11"	21055		20		10	18.28
	Black	0.13"	21005		20		10	18.28
	Purple	0.15"	21065		20		10	18.28

INVERTED ROTOR MAX™ 1/2" BSPM

PACKAGING	NOZZLE		PART NUMBER	PRICE EACH	PACK Q'TY	PRICE PER PACK	PACKS PER CARTON	WEIGHT (lbs)
	COLOR	ORIFICE SIZE						
BULK PACK	Red	0.11"	21555		20		10	18.28
	Black	0.13"	21505		20		10	18.28
	Purple	0.15"	21565		20		10	18.28

SPECIFICATIONS

DIMENSIONS ASSEMBLED		UV STABILIZED MATERIALS	BASE/CONNECTION TYPE
HEIGHT	3.8"	FRAME acetal	Inlet: THREAD 1/2" BSPM
WIDTH	3.5"	SPINNER acetal	
WEIGHT (approx)	1.35 oz	NOZZLE acetal	